

AC 1675

Cummins
Stamford
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$' z' \$", 'D:

	"	"	"	"	Amp
400/230	1675,00	1340,00	1400,00	1120,00	2020,00

fPQDE

GC,) &

,) & z

fDFDE

%\$1

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl

E

z

ALTERNATOR

TRANSFER SWITCH

AC 1675

Cummins
Stamford
D+' &'

Manufacturer		Cummins		
Model		KTA 50 G8		
		% \$\$\$ "# "		
		% &- \$\$\$ "		
		0% % \$\$\$< DQ		
	L	50,300		
	"	159 x 159		
		14,9:1		
	fl # ı	"# "	1500	
	fl ı	L	204,00	
		L	420,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	99,30		
fl ' # ı	' # "	2631,00		
	' # "	261,00		
	° C	510,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı)\$ı
	# "	289,00	222,00	155,00


		Stamford		
		PI 734C		
	Hz	50		
	"	1550,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	2237,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 1675	10100,00	5449,00	1950,00	2450,00	2000,00
		fl ı		fl ı	
	"	"	"	"	L
AK 98	15100.00	9000	2270	2550/3210	1900

AC 1675

Cummins
Stamford
D+' &'

1 D+' &'

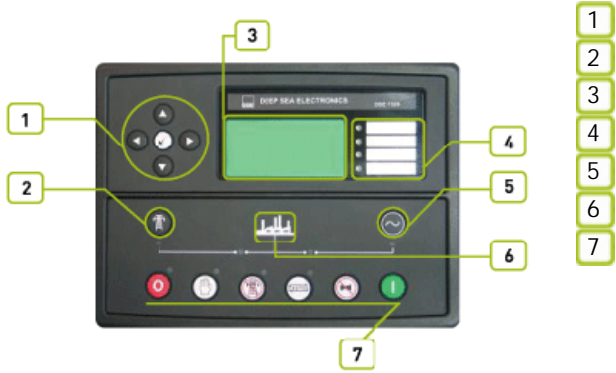

2

8G9ž '+' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž

8G9+' &\$ž 8G9+' &\$ž

ž


% &1 * (

žFG&' &žFG(,) ž

ž

AC 1675

Cummins
Stamford
D+ & "

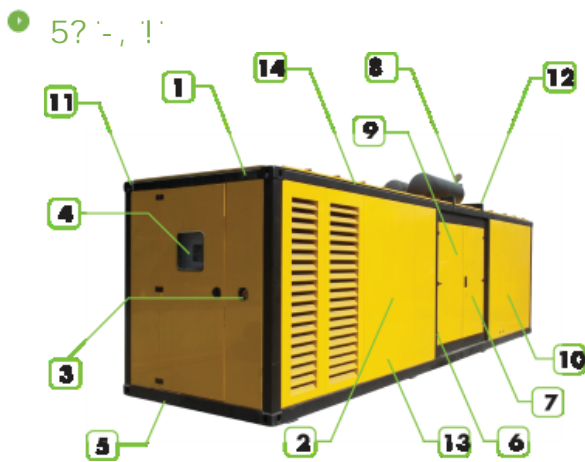

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set.
- 5 Cable out locations are under of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2270
fl "L	"	9000
fl "L	"	2550/3210
	L	1900