


AC 2250

Cummins
Stamford
D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	2250,00	1800,00	2045,00	1636,00	2955,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% %&

GC" \$(*"

z&(

GC

Standard Specifications

z

fl ! E

z

ALTERNATOR

TRANSFER SWITCH

AC 2250

Cummins
Stamford
D+' &'

Manufacturer		Cummins		
Model		QSK 60 G4		
		% \$ \$ ' "# "		
		% % \$ \$ ' "		
		Q) * + \$ \$ < D Q		
	L	60,200		
	"	159 x 190		
		14,5:1		
	fl # ı	"# "	1500	
	fl ı	L	280,00	
		L	500,00	
Absorbed Air Discharge ReSourceKey.Text	' # "	144,30		
	' # "	2374,00		
fl ' # ı	' # "	336,60		
	° C	450,00		
		24 V d.c.		
	Load	% \$ \$ ı	'+) ı) \$ ı
	# "	394,00	291,00	200,00


		Stamford
		PI 734 F
	Hz	50
	"	2080,00
7 cg'		0,80
		3
	ı ı	400/230
Temperature		H

		ı ı		ı ı	
	"	"	"	"	L
AC 2250	15500,00	5676,00	2280,00	2967,00	2000,00
		ı ı		ı ı	
	"	"	"	"	L
AK 99	21100,00	9000	2800	3300/4800	2200

AC 2250

Cummins
Stamford
D+ &

D+ &

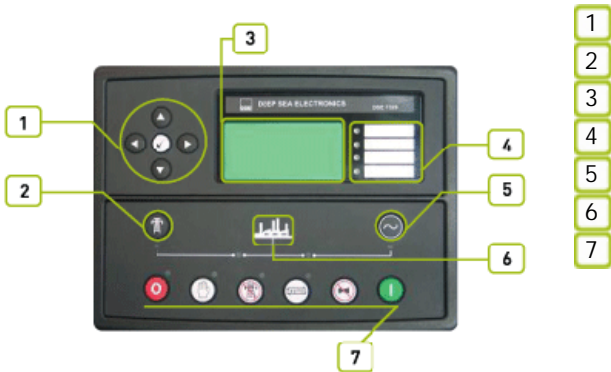

1

"8G9ž '+' &\$ž

) 5ž&&\$#(\$

2

3

4

"8G9+' &\$
&&\$' ž

"8G9+' &\$

"8G9+' &\$

% &1 * (

žFG& &žFG(,) ž

AC 2250

Cummins
Stamford
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '*\$-\$)

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

'GA 8

!&+""

%, !&*(

&(\$)


ž

ž

ž

AC 2250

Cummins
Stamford
D+ & "

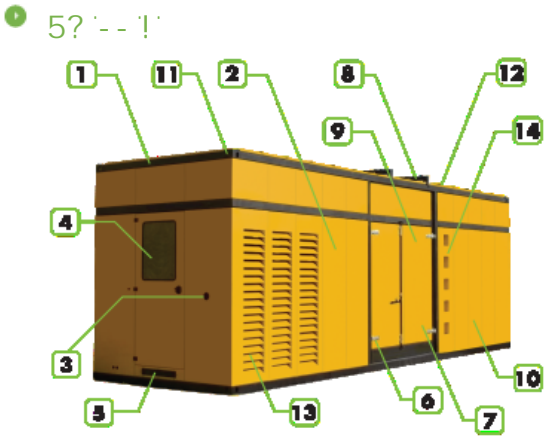

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 Cables out locations are back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system on the canopy.
- 9 special large access doors for easy maintenance
- 10 the cap on the canopy provides easy access to radiator cap.
- 11 Lifting points similar to ISO container , located on each top corner of the canopy.
- 12
- 13 sound proofing materials
- 14