

# AD 220

Doosan  
Mecc Alte  
D+ &



<b>ISO8528</b>	GC, ) &
<b>SZUTEST</b>	GC - \$\$\$
<b>CE</b>	

**2000/14/EC**

&\$\$\$( #

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	220,00	176,00	200,00	160,00	288,00

fP GDE GC, ) &

fDF DE %\$1 % %& GC" \$(\*\* z&( GC

**Standard Specifications**

z

fl ! E

z

z

**ALTERNATOR**

D: A Z'5JF

fl " E

fP \$\$# \$\$\$ E

**TRANSFER SWITCH**

fl

# AD 220

Doosan  
Mecc Alte  
D+' &'

Manufacturer	Doosan		
Model	P086TI		
		% \$\$\$ "# "	
		% - \$\$\$ "	
		Q* + \$\$\$ < DQ	
	L	8,070	
	"	111X139	
		16,4:1	
	fl # ı	"# "	1500
	fl ı	L	15,50
		L	48,50
AbsorbedAirDischargeReSourceKey.Text	' # "	12,10	
	' # "	250,00	
	' # "	34,00	
	° C	580,00	
		24 V d.c.	
	Load	% \$ı	'+)ı
	# "	) \$ı	
		43,10	31,70 21,10

	Mecc Alte		
	ECO 38 2SN/4		
	Hz	50	
	"	200,00	
7cg'		0,80	
		3	
	fl ı	400/230	
	A	288,00	
Temperature		H	

		fl ı		fl ı	
	"	"	"	"	L
AD 220	1800,00	2688,00	1150,00	1624,00	380,00
		fl ı		fl ı	
	"	"	"	"	L
AK 50	2175	3402	1160	1866	380



# AD 220

Doosan  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B '\*\$-\$)'\$

6G'9B '\*%\$\$\$!\*!&

6G'9B '\*%\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AD 220

Doosan  
Mecc Alte  
D+ &''

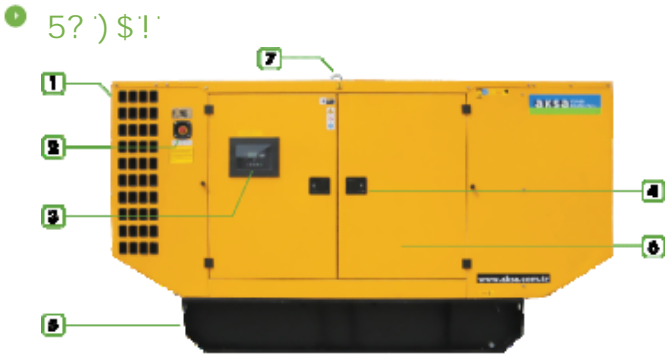

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1160
fl "L	"	3402
'fl "L	"	1866
	L	380