

# AC 250

Cummins  
Mecc Alte  
D+ &



**ISO8528**      GC , ) &-

**SZUTEST**      GC - \$\$\$%

**CE**

**2000/14/EC**      &\$\$\$#( #

z) \$' z' \$z 'D:

	"	"	"	"	Amp
400/230	250,00	200,00	225,00	180,00	324,00

fPQDE'      GC , ) &      "

fDF DE'      %&      GC " \$(\*\*      z&(      GC

**Standard Specifications**

z

fl ! E

z

z

1

fl

**ALTERNATOR**

fl " E      fPQ \$\$\$ \$\$\$' E

fl " !" \$ E

**TRANSFER SWITCH**

!

# AC 250

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		6CTAA 8,3-G2		
		% \$\$\$ "# "		
		& % \$\$\$ "		
		0 % \$\$\$ < DQ		
	L	8,300		
	"	114 x 135		
		16,7:1		
	fl # ı	"# "	1500	
	fl ı	L	23,80	
		L	32,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	15,30		
	' # "	328,33		
	' # "	40,36		
	° C	565,00		
		24 V d.c.		
	Load	% \$ı	'+)ı	) \$ı
	# "	51,80	38,00	25,00

		Mecc Alte		
		ECO 38-3SN		
	Hz	50		
	"	225,00		
7cg'		0,80		
		3		
	ıfl ı	400/230		
	A	324,00		

		ıfl ı		ıfl ı	
	"	"	"	"	L
AC 250	1940,00	2750,00	1300,00	1689,00	450,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 60	2600,00	4000	1300	1970	450



# AC 250

Cummins  
Mecc Alte  
D+ &

f@#@Bt  
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B '\*\$-) '\$

6G'9B '\*\$\$\$!\*!&

6G'9B '\*\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AC 250

Cummins  
Mecc Alte  
D+ &

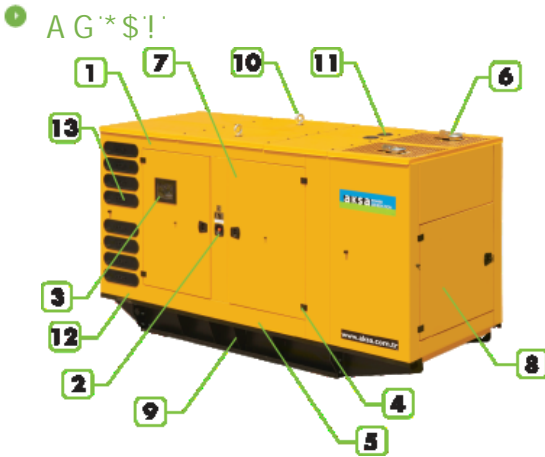

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1300
fl "L	"	4000
fl "L	"	1970
	L	450